ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

REMOVAL/INSTALL OF WINDOW REGULATOR (741-649) Dodge Durango 1998–2003, Dakota Quad Cab 2000–2003


General Tech Tips:

- Use painter's tape rather than duct tape to secure window. It will not damage paint or leave sticky residue.
- A plastic pry tool is useful. It will not easily damage delicate trim like a screwdriver or metal pry bar.
- The replacement regulator should have a liberal amount of grease on slide area. If there is not much grease present, white lithium grease works well to lubricate the slide area.
- Aftermarket window tinting can cause the window to travel slower and put additional strain on the window regulator assembly.
- Window run channels should be cleaned and lubricated before installation of a new window regulator assembly.
 Silicone spray works well.

Tools required for removal and installation of window regulator and motor assembly:

- Silicone spray lubricant
- Panel retainer remover
- Pick
- Saddle cup assembly, tape or wedge to hold window
- Flat-blade screwdriver or plastic pry tool
- 10mm socket or driver
- Phillips screwdriver

PLEASE WEAR SAFETY GLASSES!



Disclaimer:


ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

Removal Instructions

STEP 1: Remove screws from the interior door panel.



STEP 1a: Remove the power mirror switch knob (if equipped) by pulling toward the back of the door panel.

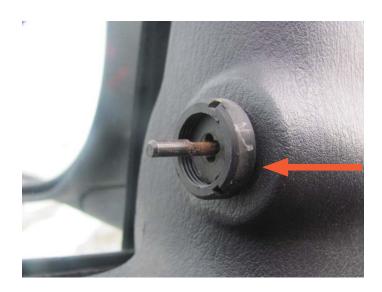

STEP 1b: Unscrew the power mirror switch retainer.

Disclaimer:

ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 2: Remove the door panel by gently pulling toward you and pushing upward to release the door from the inner door belt weatherstrip.

STEP 2a: Disconnect the door lock latch rod retainer from the door handle.



STEP 2b: Disconnect the master power switch.

STEP 3: Remove door panel.

Disclaimer:


ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 4: Remove water shield.



STEP 5: Using either a wedge tool, painter's tape or a saddle cup assembly, attach to door glass to keep the window glass from falling into the door.

STEP 6: Remove the hardware attaching the window regulator assembly to the door and the glass.

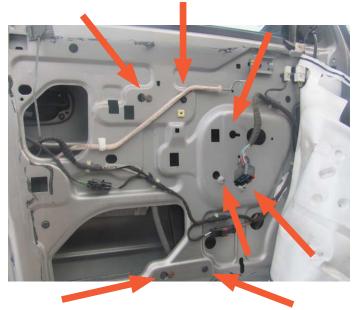


Disclaimer:

ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 6a: Unplug the window motor. (Slide out the red retainer clip from the connector.) If you miss this step you risk damaging the electrical connector.



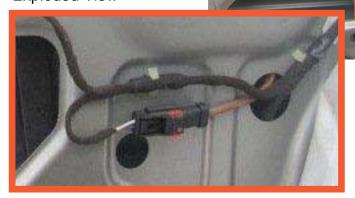

STEP 7: Remove the regulator from the door.


Disclaimer:

ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

Installation Instructions

STEP 1: Position the window regulator inside of door.

STEP 2: Install the hardware holding the window regulator onto the door.

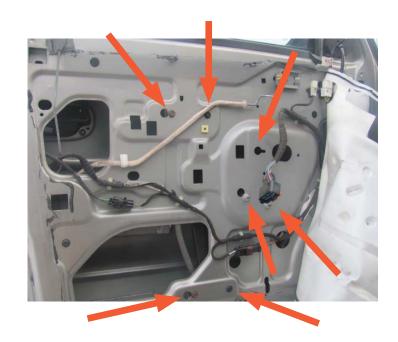

STEP 3: Connect the window regulator motor harness.

Disclaimer:

ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 3a: You may need to temporarily connect the master window switch to be able to move the window regulator plate into position. You may need to do this to be able to attach the window glass to the window regulator.

STEP 4: Tighten all of the attaching hardware holding the regulator assembly to the door.

STEP 4a: Attach the water shield.

STEP 5: Attach the door handle latch rod to the door panel.



Disclaimer:

ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 6: Connect the master window switch assembly.

STEP 7: Slide the power mirror switch (if so equipped) into the door panel.

STEP 7a: Attach the connector and knob onto the power mirror switch.



Disclaimer:

ATTENTION: Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 8: Slide the top of the door trim panel onto the Inner belt weatherstrip and gently slide the door panel into position.

STEP 9: Install the door trim panel retaining screws.



We appreciate your opinions regarding this product!
Please call our Technical Assistant with any challenges or suggestions regarding the installation or operation of this product.

1-800-523-2492

Disclaimer: